

BEBRK-LED4GR 4" Gimbal



Project:	
Type:	
Catalog #:	



STANDARD



APPLICATIONS

4" gimbal solution with integrated LED power supply and thermal management system combined in a single compact unit designed to fit most standard 4" recessed cans.

ILLUMINATION

Long life LEDs with up to 50,000 hours at 70% lumen maintenance.

Choice of 2700K (± 145), 3000K, & 4000K (± 275) color temperature with 80 CRI.

Produces 675-750 lumens output from luminaire.

Uses 1.18W high power, high quality LEDs.

ELECTRICAL

Dimmable to 10% with most dimmers.

Lutron Maestro C-L	MACL-153MR
Lutron Skylark C-L	SCL-153P
Leviton Sureslide	Cat.No.6674
Lutron	PD-6WCL
Legrand Harmony	HCL453PTCCCV6

Save 75% compared to incandescent sources.

High efficiency driver with a power factor $\geq .90$ with input power of 120V, 50-60Hz.

Built-in LED Driver.

Power consumption of 10 watts.

Operation temperature of -20°C – 40°C (-4°F – 104°F).

MOUNTING

Easy installation with integral clips.

No tools required for installation.

HOUSING

Compatible with most 4" housings.

Compatible with insulated, non-insulated, and air-tight ceilings.

Durable thermoplastic construction.

E26 medium screw-base Edison connector provides easy retrofit of incandescent housings.

WARRANTY/LISTING

Tested in accordance with IESNA LM79 & LM80.


ETL Listed for damp location.

Energy Star qualified.

Passes FCC Class B.

Five year warranty on all electronics and housing.

DIMENSIONS

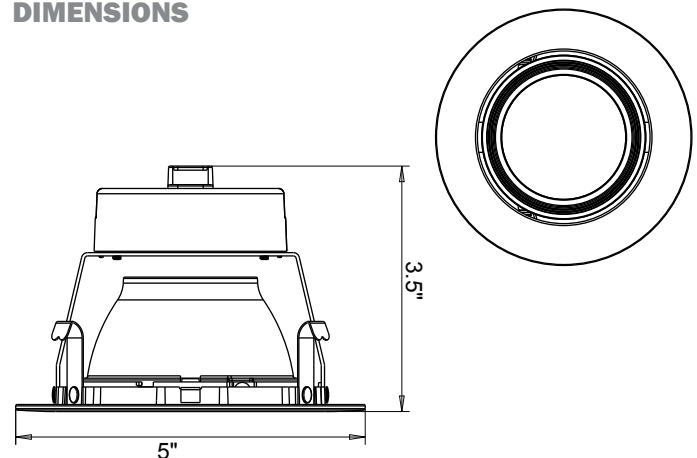

ORDERING INFORMATION

MODEL	OPTIONS	KELVIN RATING	LUMENS
BEBRK-LED4GR-27-ECO	GR GIMBAL	27K 2700 K	675
BEBRK-LED4GR-3-ECO	GR GIMBAL	3K 3000 K	675
BEBRK-LED4GR-4-ECO	GR GIMBAL	4K 4000 K	750

To place an order, call us at **1.844.459.3711**

Visit us at getbolt.net